


APRIL 2015

IMPORTANT NOTICE

Please note that for truss to top plate fixings where the truss has no overhang or is stop-ended, LUMBERLOK WIREDOGS and CEILING TIE fixings are not recommended when fixing the truss to the external wall face.

The correct fixing for this situation is either to fix on the internal wall face or use LUMBERLOK CONCEALED PURLIN CLEAT - CPC40 or CPC80.

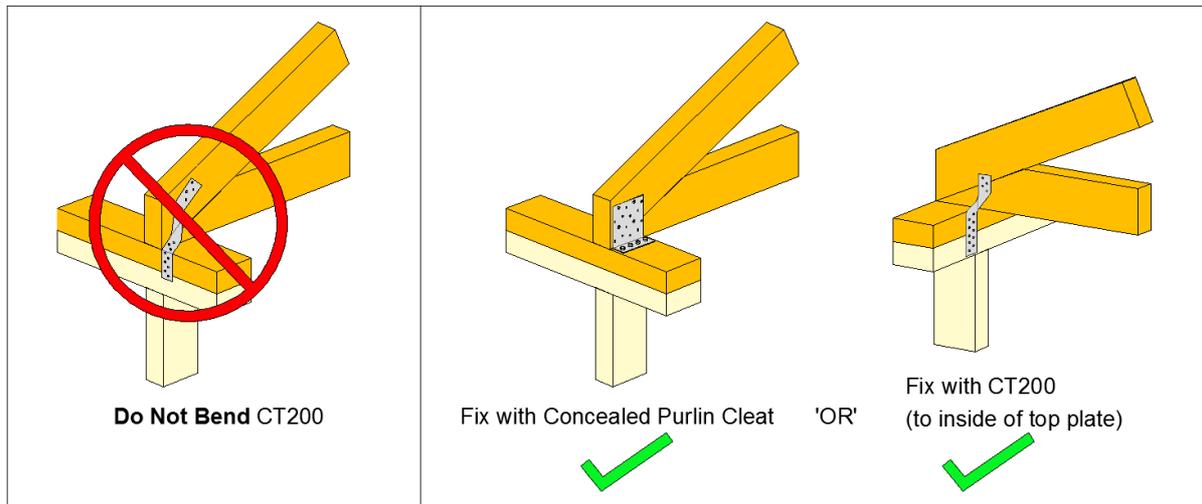

The MiTek 20/20 software doesn't identify this fixing detail arrangement and may select WIREDOGS or a CEILING TIE by default. If it does, please replace by using the table below, or by referring to the fixing report in MiTek 20/20 and the LUMBERLOK characteristic loadings brochure.

Lumberlok Fixing	Characteristic Load (Uplift)
CPC40	4.0 kN
CPC40 (1 Pair)	8.0 kN
CPC80	8.0 kN
CPC80 (1 Pair)	16.0 kN

Note: These fixings can be use on internal load-bearing walls as well.

If you have any questions please don't hesitate to contact your MiTek account manager.